


PRODUCT DATA SHEET

Pipe Floor

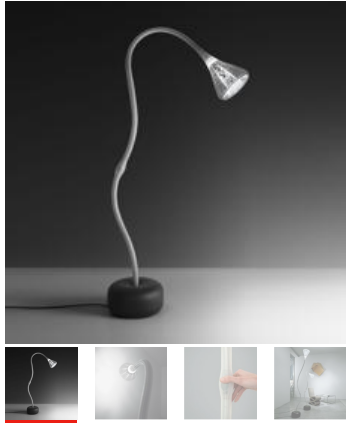

DESIGN BY:

Herzog & De Meuron
2005

MATERIALS:

Polycarbonate, steel, silicon

DESCRIPTION:

Steel base "soft touch" effect painted; stem covered by a natural platinum silicone sheath (antiyellowing); diffuser in transparent polycarbonate with rubber-effect coat; transparent lens; internal reflector made of specular aluminium with random perforations.

The body lamp is a single tubular steel structure, composed of a rigid lower part and an adjustable higher part. Touch dimmer placed on the steel.

SELECT

FLUO

Transparent

PRODUCT CODE

0673010A

Light emission



IP20



Dimmable + -

TECHNICAL DATA SHEET

FEATURES

| | |
|----------------|--|
| Product name: | Pipe Floor |
| Article Code: | 0673010A |
| Colour: | Transparent |
| Material: | Polycarbonate, steel, silicon |
| Series: | Design |
| Environment: | Indoor |
| Area contract: | Hospitality Hotel, Hospitality Restaurant, Office, Private Residence |

OPTICS

| | |
|-----------|--------------------------------|
| Emission: | Adjustable Direct And Diffused |
|-----------|--------------------------------|

DIMENSIONS

| | |
|--------------------|--------|
| Height: | cm 220 |
| Diameter: | cm 21 |
| Base Diameter: | cm 30 |
| Impact Resistance: | IK6 |
| Glow Wire Test: | 960 ° |


LAMPS INCLUDED

| | |
|-------------------------|---------|
| Category: | FLUO |
| Number: | 1 |
| Lbs: | Tc-tel |
| Watt: | 42W |
| Socket: | Gx24q-4 |
| Type: | Fsmh |
| Luminous Flux (lm): | 3200lm |
| Colour Rendering: | 1b |
| Colour temperature (K): | 3000K |
| Duration (h): | 10000h |

LUMINAIR

| | |
|---------------------|-----------------------|
| Power Supply: | Electronic Integrated |
| Watt: | 42W |
| Voltage: | 220V-240V |
| Luminous Flux (lm): | 3200lm |
| CCT: | 3000K |
| Dimmer | |
| Dimmable | |

DIMENSIONS

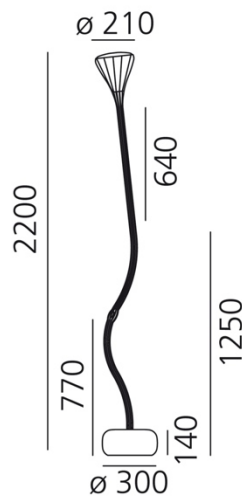

COLOUR



AWARDS

- _2006 Reddot Award Product Design "Best of the best" Essen (Deutschland)
- _2008 Designpreis der Bundesrepublik Deutschland Frankfurt (Deutschland)