

Altrove Suspension - Direct/indirect Light

MYWHITELIGHT®



DESIGN BY:

Carlotta de Bevilacqua
2008

MATERIALS:

Steel, Prismoptic, aluminium, methacrylate, PETG

DESCRIPTION:

In a m2 of surface where the light flows in a fluid way on transparent wires and, through a mirrored reflector, materializes a lighting and volumetric effect wich is controlled. It is a cubic metre of light where everything is endlessly reflected, freely modulating more than a million of chromatic effects. The space is no more just one, but several, or simply "else", illusory perception of reality, which drives to a new place, elsewhere. Three versions are available, with three kind of light. Opening light: perimeter structure made of steel, top side mirror reflector, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate. Volumetric light: perimeter structure made of steel, top side segment reflector, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate. Fluid light: perimeter structure made of steel, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate.

RF remote control included.

SELECT

FLUO

Mirror

PRODUCT CODE

1340050A

Light emission



Dimmable

TECHNICAL DATA SHEET

FEATURES

Product name: Altrove Suspension - Direct/indirect Light
Article Code: 1340050A
Colour: Mirror
Material: Steel, Prismoptic, aluminium, methacrylate, PETG
Series: Design, My White Light
Environment: Indoor


OPTICS

Emission: Diffused

DIMENSIONS

Length: cm 100
Width: cm 100
Height: cm 10
Max Height from ceiling: cm 200
Impact Resistance: N.D.
Glow Wire Test: 850 °

DIMENSIONS

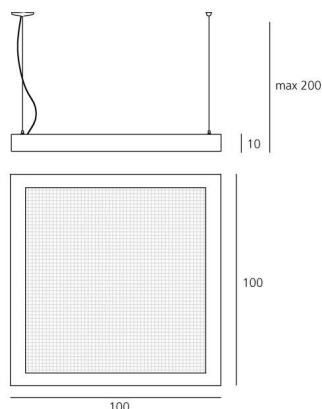

COLOUR



LAMPS INCLUDED

Category: FLUO
Number: 6
Lbs: T16
Watt: 39W
Socket: G5
Type: FDH-39
Luminous Flux (lm): 3100lm
Colour Rendering: 85
Colour temperature (K): 3000K

Watt:	78W + 78W
Voltage:	220V-240V
Remote control:	RF remote control
CCT:	3000K
Dimmable	

ACCESSORIES

NO
IMAGE
AVAILABLE

**ALTROVE MWL KIT
SOSP/ALIMENT. 1339010A**